



CMC S19E
“E” stands for EASY:
easy operation,
easy maintenance,
perfect for hire!
Only one working area
with 200 kg unrestricted!

The CMC S19E is a narrow tracked boom lift. It is ultra-compact and user-friendly, with intuitive controls and no fuss. The S19E can pass through a single doorway and operate in the tightest space. With an impressive height and outreach. The maximum basket capacity is 200 kg.



REV 3.17 artsmeda





Single Doorway width (780 mm)



Towable Transportable




Electro-hydraulic proportional controls



OPTIONAL

Hydraulic extending tracks



OPTIONAL

Eco Battery



OPTIONAL

Kubota Diesel Engine



OPTIONAL

Dual Voltage AC Motor



Simple to use

User-friendly, with intuitive 4-step operation from start to working at height.

Power options

Honda GX 390 gasoline engine. As optional: Kubota Z842 diesel engine, electric engine of 220V or 120V or 110V, lithium power batteries with electric motor.

Service friendly

Simple operating system with fault code diagnosis and easy to repair on-site.

Easy

E stands for Easy. No motion restrictors, no limits for your work.

Versatile

Articulated boom with telescopic and jib, plus innovative basket design offers unrivaled performance.

Towable transportable

Low weight and very compact, so suitable to tow on a trailer behind mid-size vans and 4x4 vehicles.

PERFORMANCE

Max working height	18,7 m
Max working outreach	9,0 m
Max load on the basket	200 kg
Jib movement	90°
Turret rotation	±178° (Tot. 356°)
Basket rotation	N.A.
P Max. slope to stabilize	5° / 9%
Tracks enlargement (optional)	0,30 m
W Max. ramp slope (attack)	13° / 23%
X Max. slope to travel	14° / 25%
Max. travel speed	0,57/1,07 km/h

DIMENSIONS



A Basket height	1,10 m
B Basket width	0,70 m
C Basket length	1,20 m
D Total length	5,22 m
E Total length without basket	4,58 m
F Height in driving position	1,97 m
G Total width (without basket)	0,78 m
H Free height from the ground	0,22 m
I Tracks (LxP)	1,44 x 0,18 m
J Max. longitudinal stabilization.	3,90 m
K Max. cross stabilization.	3,25 m
Stabilizers plate Ø	0,18 m

WEIGHTS

Total weight	2.690 kg/5.930 lb (Honda) 2.690 kg/5.930 lb (Kubota)
R Max pressure on the foot	6,3 kg/cm ² - 61,8 N/cm ²
S Max pressure on the track	0,87 kg/cm ² - 8,5 N/cm ²
T Max pressure in travel	313 kg/ m ² - 3,07 N/m ²
U Max pressure in work	205 kg/ m ² - 2,01 N/m ²

POWER

Standard power	
Gasoline	Honda GX390 (6,0 kW)
Fuel tank capacity	6,1L

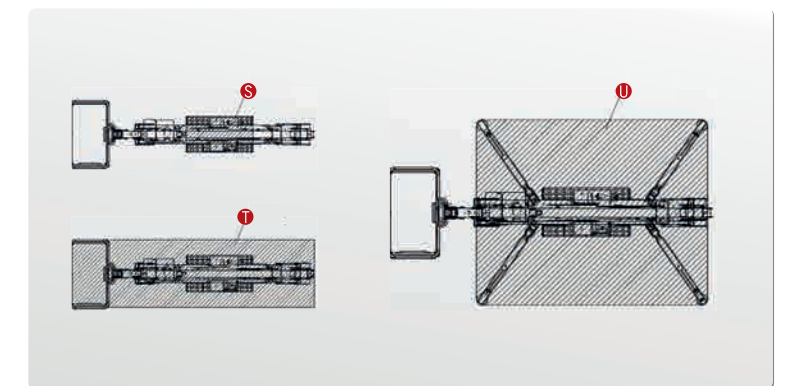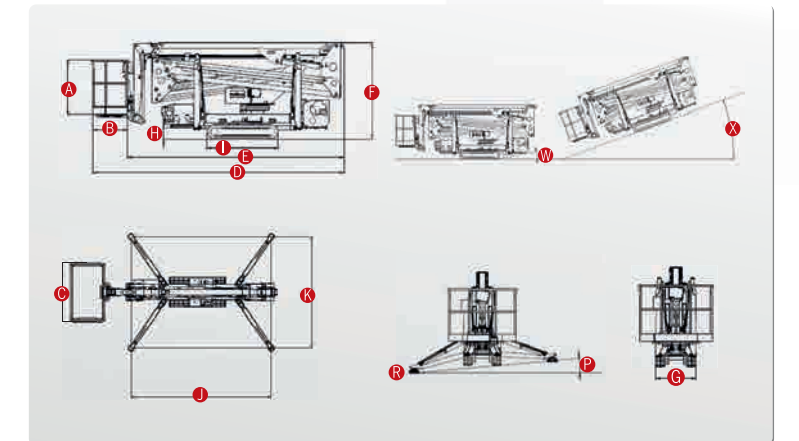

MAX LOAD 200 kg/441 lb

